

Electrolux Professional



Range Overview

Hospitality
Laundry



Thinking of you
Electrolux

Excellent solutions for cost savings and reliability

Boasting intelligent features and unique extras, our excellent solutions offer the utmost in quality combined with the lowest utility costs for in-house laundries of all sizes. For total control of your laundry costs.

Electrolux Excellence



Excellence is central to everything we do. By anticipating our customers' needs, we strive for Excellence with our people, innovations, solutions and services. Thus making our customers' work and life easier and more profitable.

Washer Extractor Control

ensures the best utility cost optimisation and customising




Clarus Control®

- ▶ Fully programmable with up to 194 programs for unparalleled versatility
- ▶ Create new programs directly on Clarus Control® panel or on your PC with Laundry Program Manager, then transfer them to machines via memory card
- ▶ Intelligent parameters save time, energy and water while delivering excellent wash and rinse results in every application
- ▶ 8 liquid detergent signals, plus accurate detergent dosing via connection to Efficient Dosing System
- ▶ Process monitoring via Certus Management™ Information System



Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 programmable
- ▶ Large, clear display in 18 languages, plus Real-time clock
- ▶ Process monitoring via Certus Management™ Information System



Unique Triangle Technology

The best flexibility and process performance

- ▶ **Economy:** optimal cost efficiency for medium-soiled garments due to low energy consumption
- ▶ **Time:** the highest output volume for lightly-soiled garments due to shorter process times
- ▶ **Performance:** the best cleaning results for heavily-soiled garments


Tumble Dryer Control

ensures the best flexibility and usability



Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 self programmable
- ▶ Large, clear display in 18 languages, plus Real-time clock
- ▶ Process monitoring via Certus Management™ Information System



Unique Triangle Technology

The best flexibility and process performance

- ▶ **Economy:** optimum cost-effectiveness due to low energy consumption
- ▶ **Time:** the highest output due to short process time
- ▶ **Care:** the best drying results



Selecta Control®

- ▶ Accurate temperature/humidity control for quick, efficient drying
- ▶ Automatic inversion of drum rotation
- ▶ Automatic cooling cycle reduces creasing and improves finish
- ▶ 9 programs, including for entire electronic cycle, exact temperature control and constantly high drying performance
- ▶ Select drying time, cooling and reverse action
- ▶ Continuous self-testing, displays and logs error codes for easy troubleshooting
- ▶ Process monitoring via Certus Management™ Information System

Ironer Control

ensures the best results thanks to process optimisation



Electronic control

- ▶ Large, intuitive display
- ▶ Indicator light informs operator if retained humidity after ironing is too high
- ▶ Ensures optimum dryness and hygiene, plus compliance with risk analysis and bio-contamination quality control
- ▶ Process monitoring via Certus Management™ Information System




Electro-mechanical control

- ▶ Easy to read and set
- ▶ Ironing temperature and speed can be adjusted at any time
- ▶ Autostop function to maximise ironing belt lifetime (standard)

Washer Extractors


Choose the solution that suits you best

● standard ○ option
x available – not available

<div>  </div>								
<div> Washer Extractors Soft Mount H High Spin Range </div>								
	W555H	W565H	W575H	W5105H	W5130H	W5180H	W5240H	W5300H
Drum volume, l	53	65	75	105	130	180	240	300
Dry weight capacity, kg/lb	6/13	7/15	8/18	11/25	14/30	20/45	27/60	33/75
G-factor	530	450	450	450	450	450	450	400
Width, mm	595	720	720	830	910	970	1020	1020
Depth, mm	680	690	690	705	785	870	915	1060
Height, mm	850	1115	1115	1200	1325	1410	1445	1445
Width, in	23 7/16"	28 6/16"	28 6/16"	32 11/16"	35 13/16"	38 3/16"	40 3/16"	40 3/16"
Depth, in	26 12/16"	27 3/16"	27 3/16"	27 12/16"	30 14/16"	34 4/16"	36	41 4/4"
Height, in	33 7/16"	43 14/16"	43 14/16"	47 4/16"	52 3/16"	55 8/16"	56 7/8"	56 7/8"
Electric/Steam/Non-heated	x/-/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x
Compass Pro®	●	●	●	●	●	●	●	●
Clarus Control® *	–	○	○	○	○	○	○	○
Wet-cleaning Excellence	–	–	–	○	○	○	○	○

Front and side panel in stainless steel as option. More information on product data sheet.

* Machines with Clarus Control® are designed with horizontal wave and meet the specifications of Generation 4000.

<div> N Normal Spin S Super Spin X Extra Spin </div>										
<div>  </div>										
<div> Washer Extractors Solid Mount N / S / X Spin Range </div>										
	W575N/S	W585N/S	W5105N/S	W5130N/S	W5180N/S	W5250N/S	W5330N/S	W5280X	W5350X	W5600X
Drum volume, l	75	85	105	130	180	250	330	280	350	600
Dry weight capacity, kg/lb	8/18	9/20	11/25	14/30	20/45	28/62	35/77	28/62	35/77	65/145
Extraction, rpm (N/S)	587/830	587/830	548//775	548/775	525/740	497/700	474/670			
Extraction, rpm (X)								805	650	650
G-factor (N/S)	100/200	100/200	100/200	100/200	100/200	100/200	100/200			
G-factor (X)								300	220	220
Width, mm	660	660	720	720	750	830	910	935	1085	1145
Depth, mm	690	730	705	790	880	955	1040	970	1105	1375
Height, mm	1115	1115	1200	1200	1333	1410	1445	1455	1570	1670
Width, in	26"	26"	28 6/16"	28 6/16"	29 8/16"	32 11/16"	35 13/16"	36 13/16"	42 11/16"	45 1/16"
Depth, in	27 3/16"	28 3/4"	27 3/4"	31 2/16"	34 10/16"	37 10/16"	40 15/16"	38 3/16"	43 1/2"	54 2/16"
Height, in	43 14/16"	43 14/16"	47 4/16"	47 4/16"	52 3/16"	55 8/16"	56 14/16"	57 5/16"	61 13/16"	65 12/16"
Electric/Steam/Non-heated	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	-/x/x	x/x/x	x/x/x
Compass Pro®	●	●	●	●	●	●	●	●	●	●
Clarus Control® (S/X) *	○	○	○	○	○	○	○	○	○	○

Front and side panel in stainless steel as option. More information on product data sheet.

* Machines with Clarus Control® are designed with horizontal wave and meet the specifications of Generation 4000.

● standard ○ option
x available – not available

Washer Extractors Soft Mount H High Spin Range



Drum volume, l	400	600	850	1100
Dry weight capacity, kg/lb	45/100	65/145	90/200	120/265
Extraction, rpm	825	800	720	663
G-factor	350	350	350	300
Water consumption cold/hot, l*	programmable	programmable	programmable	programmable
Width, mm	1330	1390	1640	1640
Depth, mm	1360	1600	1630	1845
Height, mm	1890	2015	2230	2230
Width, in	52 6/16"	54 12/16"	64 9/16"	64 9/16"
Depth, in	53 9/16"	63	64 3/16"	72 10/16"
Height, in	74 7/16"	79 5/16"	87 13/16"	87 13/16"
Electric/Steam/Non-heated	x/x/x	x/x/x	–/x/x	–/x/x
Clarus Control®	●	●	●	●
Wet-cleaning Excellence	○	–	–	–

* Consumption data: Normal 60 °C (140 °F) program (without pre-wash, 3 rinses at rated capacity electrical heating)

Wash&Dry



Drum volume, l	130	240
Dry weight capacity, kg/lb	8/18	15/33
Extraction, rpm	980	980
G-factor	350	350
Water consumption cold/hot, l*	48/12	82/22
Electric/Electric	●	●
Width, mm	910	1020
Depth, mm	1110	1350
Height, mm	1330	1450
Width, in	35 13/16"	40 3/16"
Depth, in	43 11/16"	53 1/8"
Height, in	52 3/8"	57 1/16"
Electric/Gas/Non-heated	x/x/x	x/x/x
Compass Pro®	●	●
Wet-cleaning Excellence	–	○

* Consumption data: Normal 60 °C (140 °F) program

Washer Extractors Soft Mount Barrier Washer Extractors



Drum volume, l	180	250	350	500	700	900	1100
Dry weight capacity, kg/lb	18/40	25/55	35/77	50/110	70/154	90/198	110/242
Extraction, rpm	910	910	910	910	720	720	720
G-factor	350	350	350	350	300	300	300
Width, mm	895	1050	1270	1567	1496	1726	1956
Depth, mm	1040	1050	1060	1055	1483	1483	1483
Height, mm	1620	1620	1620	1610	2040	2040	2040
Width, in	35 1/4"	41 5/16"	50"	61 11/16"	58 14/16"	67 15/16"	77
Depth, in	40 15/16"	41 5/16"	41 3/4"	41 9/16"	58 6/16"	58 6/16"	58 6/16"
Height, in	63 3/4"	63 3/4"	63 3/4"	63 6/16"	80 5/16"	80 5/2"	80 5/16"
Electric/Steam/Gas/Thermal Oil	x/x/x/-	x/x/x/-	x/x/x/-	x/x/x/x	x/x/-/x	x/x/-/x	x/x/-/x
Water consumption (cold) litre El*/Gas	165/185	230/250	322/342	610/638	990/–	1190/–	1490/–
Compass Pro®	●	●	●	–	–	–	–
Clarus Control®	–	–	–	●	–	–	–
Clarus TS®	–	–	–	–	●	●	●

* El or Steam

Tumble Dryers

Find the solution that meets your needs

- standard

○ option

✕ available

– not available


Tumble Dryers									
	T5130	T5190	T5250	T5290	T5350	T5550	T5675	T4900	T41200
Drum volume, l	130	190	250	290	350	550	675	900	1200
Dry weight capacity, kg/lb	6/13	10,6/23	13,9/30	16,1/35,5	19,4/42	30,5/67,2	37,5/82,7	50/110	66,7/147
Width, mm	595	720	790	710	790	960	960	1290	1290
Depth, mm	715	745	900	1155	1120	1315	1510	1295	1485
Height, mm	850	1130	1720	1675	1720	1855	1855	2465	2465
Width, in	23 7/16"	28 3/8"	31 1/8"	27 15/16"	31 1/8"	37 13/16"	37 13/16"	50 13/16"	50 13/16"
Depth, in	28 1/8"	29 5/16"	35 7/16"	45 1/2"	44 1/8"	51 3/4"	59 7/16"	51	58 7/16"
Height, in	33 7/16"	44 1/2"	67 11/16"	65 15/16"	67 11/16"	73 1/16"	73 1/16"	97	97
Electric/Gas/Steam	●/–/–	●/–/–	✕/✕/✕	✕/✕/✕	✕/✕/✕	✕/✕/✕	✕/✕/✕	✕/✕/✕	✕/✕/✕
Energy kWh/l water evaporated* (Electric/Gas/Steam)	0.94/–/–	0.92/–/–	0.95/1.09/2.23	0.96/1.06/1.37	0.99/1.03/1.48	0.98/1.06/1.22	0.98/1.07/1.26	1.2/1.16/1.91	1.17/1.23/1.68**
Selecta Control®	–	–	–	–	–	–	–	●	●
Compass Pro®	●	●	●	●	●	●	●	–	–
Residual Moisture Control	●	○	○	○	○	○	○	●	●
Reversing Drum Action	●	○	○	○	○	○	○	●	●
Lagoon® Wet-cleaning Excellence	–	–	○	○	○	○	○	○	○
Sliding door	–	–	–	–	–	–	–	○	○

Front panel in stainless steel as option. More information on product data sheet.

*At rated capacity 100 % cotton load at 50 % initial moisture dried to 0 %

**Test load 48 kg / 100 lbs



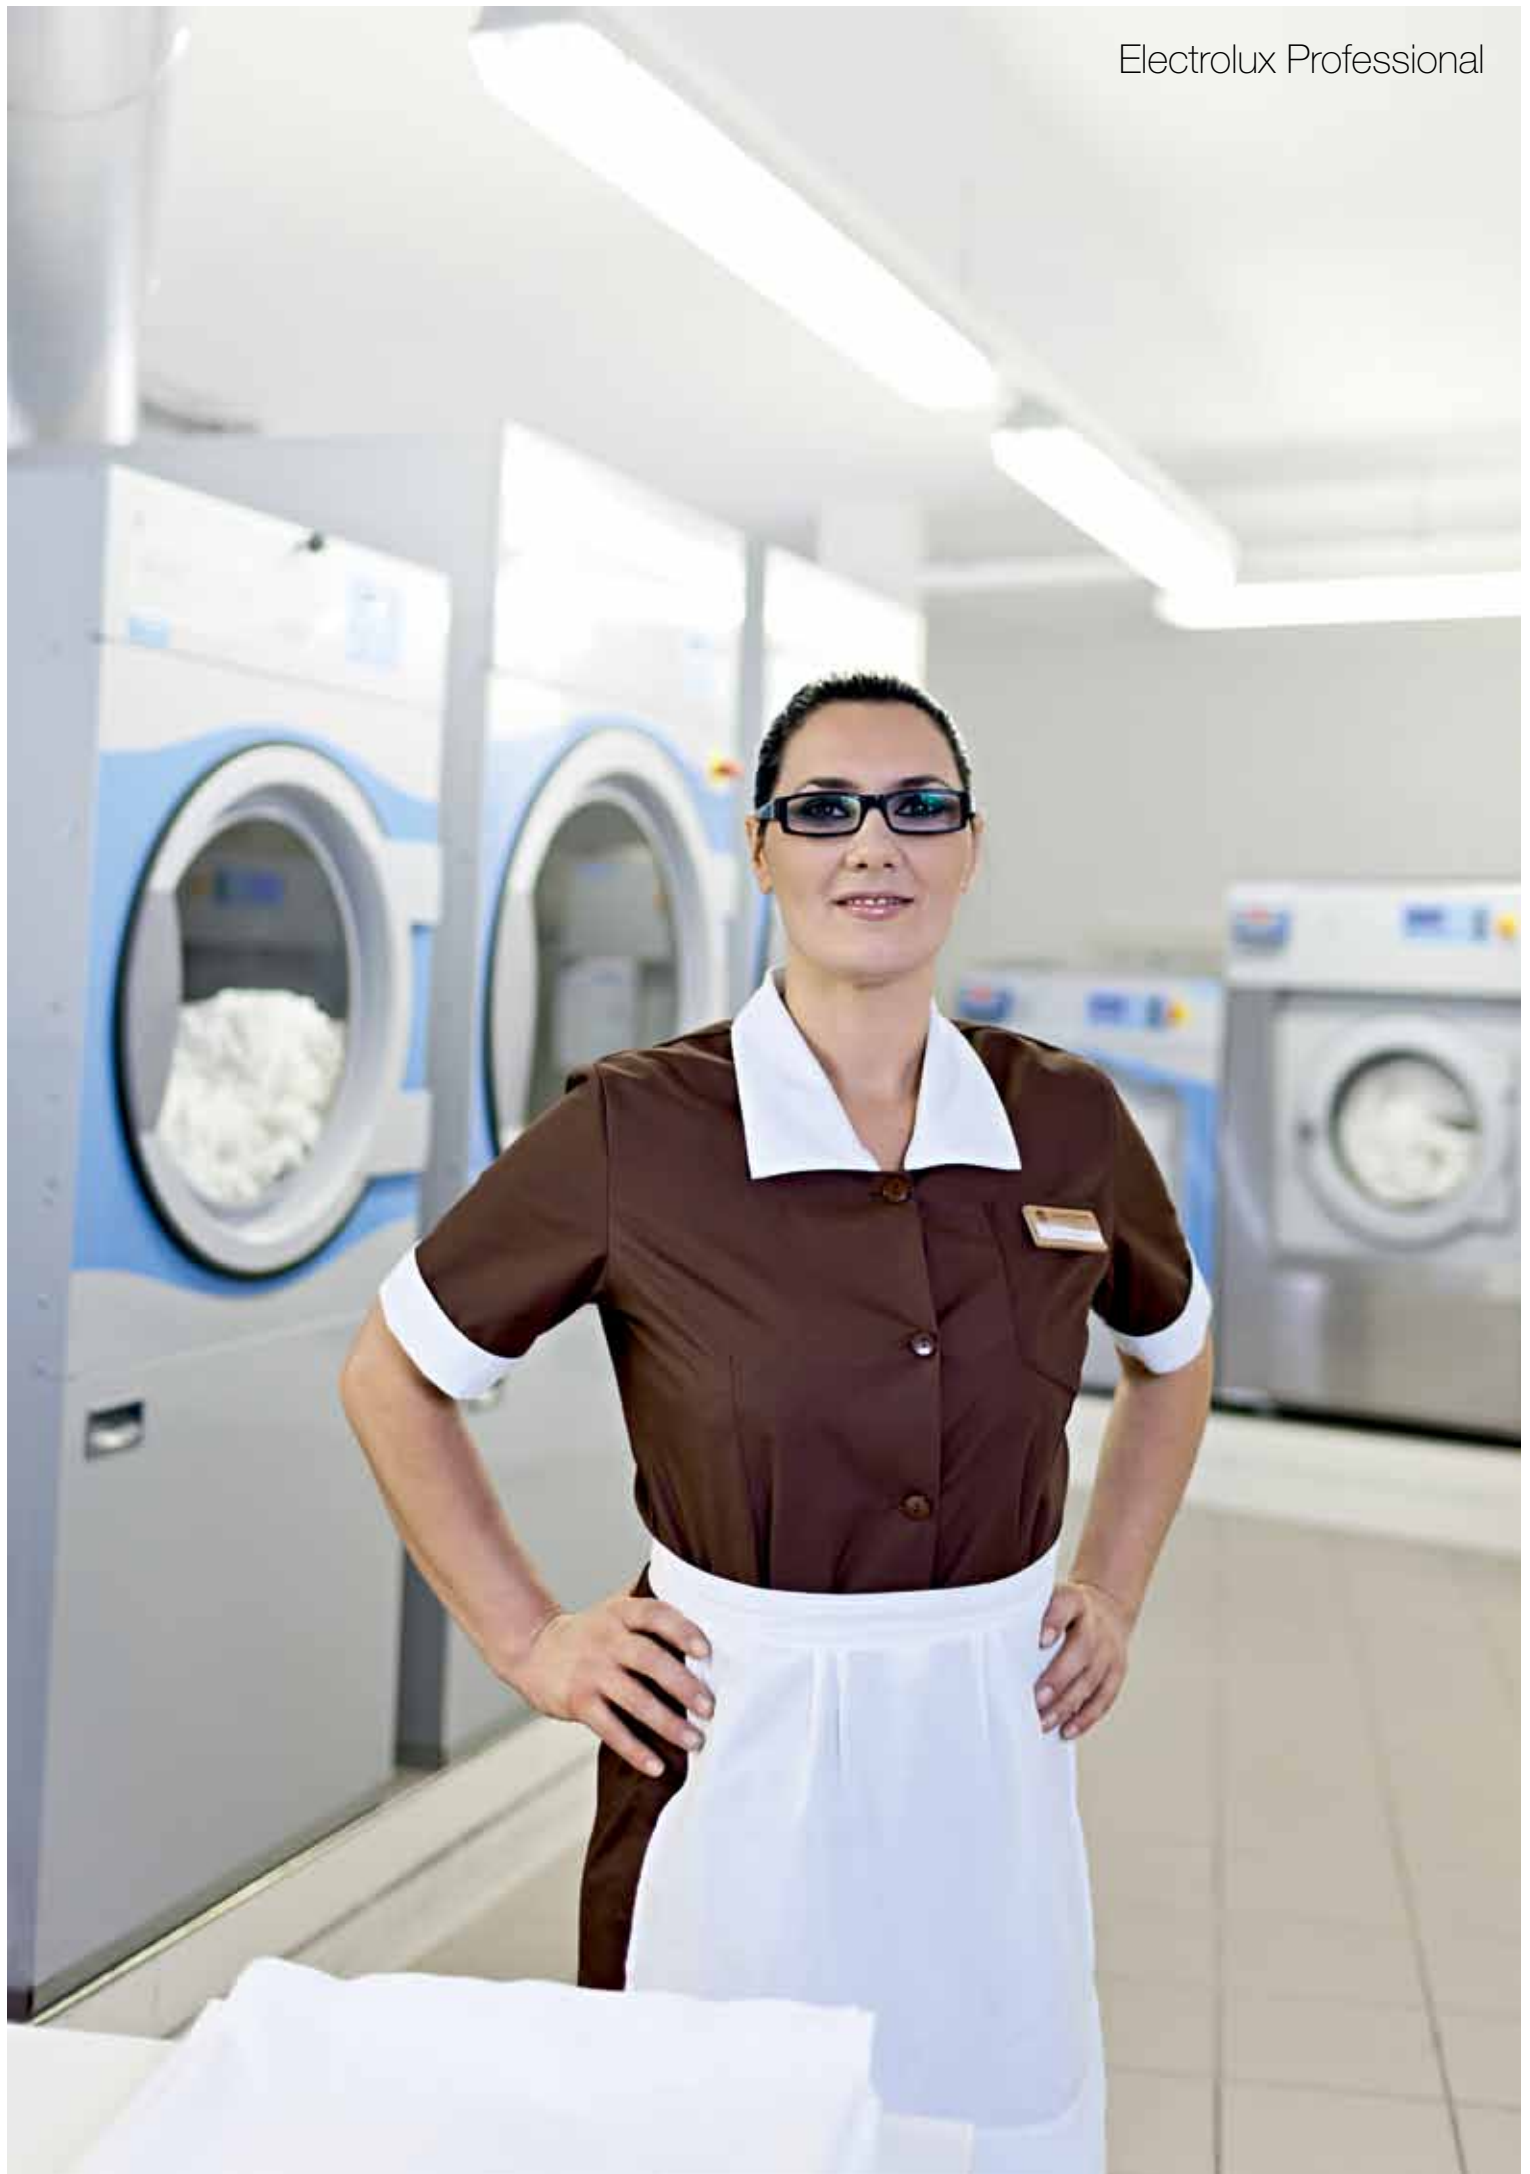



Ironers


Discover which solution is best for you

● standard ○ option
x available – not available


										
Ironers	IC43316	IC43320	IC44819	IC44821	IC44825	IC44828	IC44832	IC44819 FFS	IC44825 FFS	IC44832 FFS
Roll diameter mm/in	325/13	325/13	479/19	479/19	479/19	479/19	479/19	479/19	479/19	479/19
Ironing width mm/in	1650/65	2065/81	1910/75	2120/83	2540/100	2750/108	3170/125	1910/75	2540/100	3170/125
Width, mm	2030	710	2575	2785	3205	3415	3835	3810	4410	4910
Depth, mm	690	1155	1070	1070	1070	1070	1070	1730	1730	1730
Height, mm	1145	1675	1270	1270	1270	1270	1270	1675	1675	1675
Width, in	79 15/16"	27 15/16"	26 12/16"	126 3/16"	126 3/16"	134 7/16"	151	150	173 10/16"	193 5/16"
Depth, in	27 3/16"	45 1/2"	40 6/16"	40 6/16"	40 6/16"	40 6/16"	40 6/16"	68 2/16"	68 15/16"	68 15/16"
Height, in	45 1/16"	65 15/16"	50	50	50	50	50	65 15/16"	65 15/16"	65 15/16"
Width, mm (with Feeding and Length Folding)	–	–	2575	2785	3205	3415	3835	–	–	–
Depth, mm (with Feeding and Length Folding)	–	–	1280	1280	1280	1280	1280	–	–	–
Height, mm (with Feeding and Length Folding)	–	–	1460	1460	1460	1460	1460	–	–	–
Width, in (with Feeding and Length Folding)	–	–	101-16/16"	126-3/16"	126-3/16"	134-7/16"	151	–	–	–
Depth, in (with Feeding and Length Folding)	–	–	50	50	50	50	50	–	–	–
Height, in (with Feeding and Length Folding)	–	–	57	57	57	57	57	–	–	–
Electric/Gas/Steam	x/–/x	x/–/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x
Evaporation capacity l/h	19.5	24.5	38/57/35	40/63/37	48/75/46	51/81/51	59/93/59	38/57/35	48/75/46	59/93/59
Speed m/minute	0.5 to 5.5	0.5 to 5.5	1.5 to 9	1.5 to 9	1.5 to 9	1.5 to 9	1.5 to 9	1.5 to 11	1.5 to 11	1.5 to 11
Ironer Moisture	○	○	●	●	●	●	●	●	●	●
Dubixium™*	–	–	○	○	○	○	○	●	●	●
Automatic feeding	–	–	○	○	○	○	○	●	●	●
Automatic folding	–	–	○	○	○	○	○	●	●	●

* For electric and gas heated versions

			
Ironers	IB42310	IB42314	IB42316
Roll diameter mm/in	230/9	230/9	230/9
Ironing width mm/in	1000/39	1400/55	1650/64
Width, mm	1395	1795	2045
Depth, mm	510	510	510
Height, mm	1025	1025	1025
Width, in	54 15/16"	70 11/16"	80 8/16"
Depth, in	20 1/16"	20 1/16"	20 1/16"
Height, in	40 6/16"	40 6/16"	40 6/16"
Electric	x	x	x
Evaporation capacity l/h	5	6,5	8,1
Speed m/minute	1 to 4	1 to 4	1 to 4

		
Ironers	C-Flex 900	C-Flex 1200
Roll diameter mm/in	900/35	1200/47
Ironing width mm/in	2700 to 4200/118 to 165	2700 to 4200/118 to 165
WidthxDepthxHeight (1 roll), mm*	4500x1685x1560	4500x1985x1760
WidthxDepthxHeight (2 rolls), mm*	4500x2955x1560	4500x3555x1760
WidthxDepthxHeight (3 rolls), mm*	4500x4225x1560	4500x5125x1760
WidthxDepthxHeight (1 roll), in	165 6/16" x 78 9/16" x 61 7/16"	165 6/16" x 91 5/16" x 69 5/16"
WidthxDepthxHeight (2 rolls), in	165 6/16" x 130 14/16" x 61 7/16"	165 6/16" x 157 5/16" x 69 5/16"
WidthxDepthxHeight (3 rolls), in	165 6/16" x 183 11/16" x 61 7/16"	165 6/16" x 219 2/16" x 69 5/16"
Steam/Gas/Thermal Oil	x/x/x	x/x/x
Evaporation capacity l/h	189 to 731	230 to 1260
Number of rolls	1 to 3	1 to 3
Speed m/minute	5 to 50	5 to 50

* For 3.3 m working width models

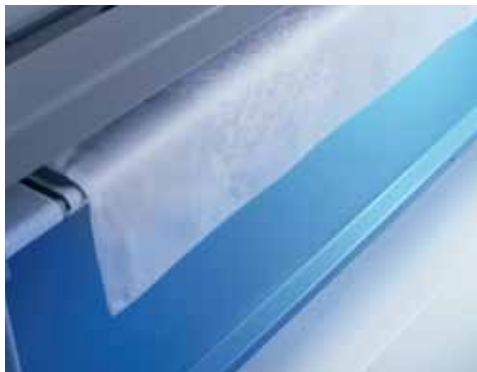

Save time and human resources

One compact machine that can process your flatwork with one operator

Feeding, Folding and Stacking are all performed automatically.

Full Automatic Folding

- Automatically measures each item for perfect fold

Full Automatic Feeding

- Finish your largest items with only one operator!

Full Automatic Stacking

- Perfect piles, ready to be stored in your trolleys

Finishing equipment

Finishing solutions that meet your needs

Tables



FIT1 Folding Table
with manual boiler (2 hours) + iron



FIT2B Vacuum Ironing Table
with integrated automatic boiler



FIT1-WC Vacuum/Blowing Table
(left ended) without boiler

Finisher



FSF2 Blowing Shirt Finisher
FSF3 Pressing Shirt Finisher



FFT-WC Jacket Multi-form Finisher



FTT2 Trouser Topper

Spotting units



FSU3 Pre-Spotting Portable Table



FSU4 Pre-Spotting and Pre-Brushing Cabinet
with vacuum

Boiler



FSB24C Boiler 24 kW
with condensate collecting tank

This is a selection of the key finishing products.
A wide range of options and accessories
(trolleys, bases, condensing units, etc)
is also available, ask our local offices!

Presses



FPA6-WC Collar and Cuff Press



FPA1-WC Automatic Laundry Press
with universal shape



FPA3-WC Automatic Laundry Mushroom Press



FPA1-D Automatic Cleaning Press
with universal shape

Fin Cabinet



FC48 Finishing Cabinet 8 hangers

Marking Machine



Y150 Marking Machine

Unique Service Excellence

Always near.
Always there for you

A reliable, global presence: Electrolux Professional offers the most extensive service network of skilled, authorised partners for daily tasks: installation, spare parts and maintenance. All of them provide an efficient customer service and fast technical assistance. A global service network for prompt, expert advice worldwide.

- ▶ 1,900 authorised service centres
- ▶ Over 7,000 expert technicians
- ▶ 44,000 available spare parts in stock
- ▶ Spare parts available for at least 10 years from the end of production
- ▶ 24-48 hr spare parts delivery worldwide



Thinking of you
Electrolux


Electrolux Professional Hospitality Laundry

In-House Laundry Solutions

Consumer Operated Laundry Solutions

Commercial Laundry Solutions

Hygiene Laundry Solutions

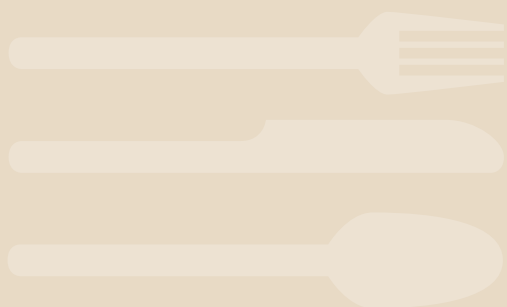

Excellence with the environment in mind

Electrolux Professional solutions perfectly match the customers' needs, including the areas of reliability, cost efficiency and sustainability. The products are the best in terms of quality – durability with low running costs. Some installations have been running for more than 40 years!

- ▶ All Electrolux factories are ISO 14001-certified
- ▶ All Electrolux Professional products are designed for low water, energy and detergent consumption, and for low emissions into the environment
- ▶ All Electrolux Professional products are ROHS-compliant and over 95 % recyclable
- ▶ All units are quality tested, piece by piece, and all of the functions are singularly checked by expert technicians
- ▶ In the last five years, more than 70% of Electrolux Professional solutions have been updated with features that are always designed with the needs of customers and environmental considerations in mind



**Discover the Electrolux Excellence
and share more of our thinking at
www.electrolux.com/professional**